

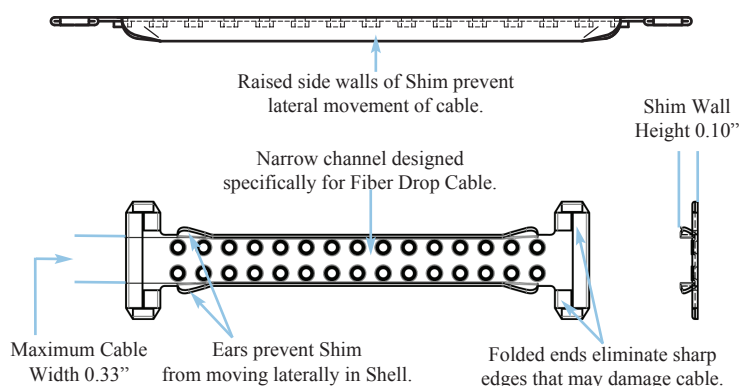


## FIBER OPTIC DROP WIRE CLAMP

- A three-piece clamp designed to support Corning's SST-Drop™ Fiber Cable and ROC™ Fiber Drop Cable, as well as similar cables produced by other manufacturers.
- The clamp is rated to support Fiber Drop Cables to a maximum of 325lbs with minimal attenuation.
- Shell, Wedge, and Shim are stamped from #304 Stainless Steel. The Bail Wire is formed from dead-soft #430 Stainless Steel.
- Custom shim prevents Fiber Cable from moving laterally after installation.
- Patent protected.


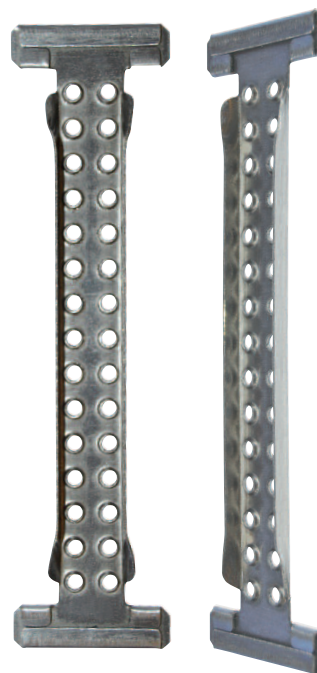


### Dimensions

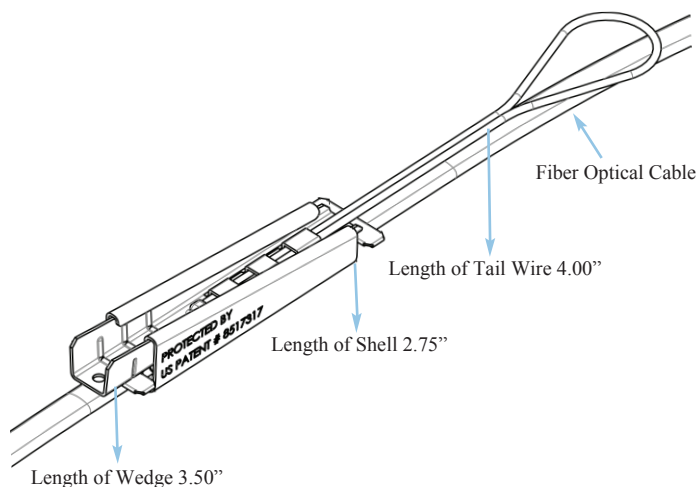

Part #	Pkg Qty	Pkg Per Carton	Carton Weight (lbs.)
910	25	20	47
910B*	25	20	47

\* The outside of Shell and Wedge are black.



**For technical assistance, sample, or quote**  
**Please call us at (516)512-7600 or email us at [orders@alliedboltinc.com](mailto:orders@alliedboltinc.com)**


3000 Marcus Ave., Suite 3E09 Lake Success, NY 11042  
 Fax: (516)512-7611 • [www.alliedboltinc.com](http://www.alliedboltinc.com)

Copyright © 2021 Allied Bolt Products, LLC. All Rights Reserved.

## FIBER OPTIC DROP WIRE CLAMP


### Installations

1

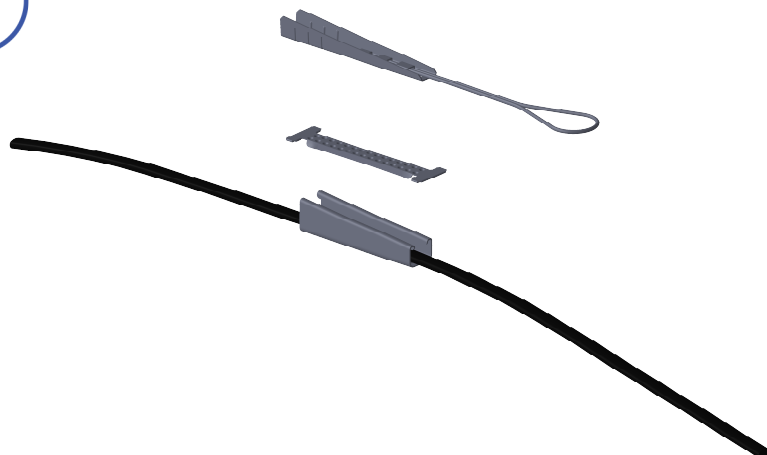

Place Fiber Drop Cable  
in Shell.

2


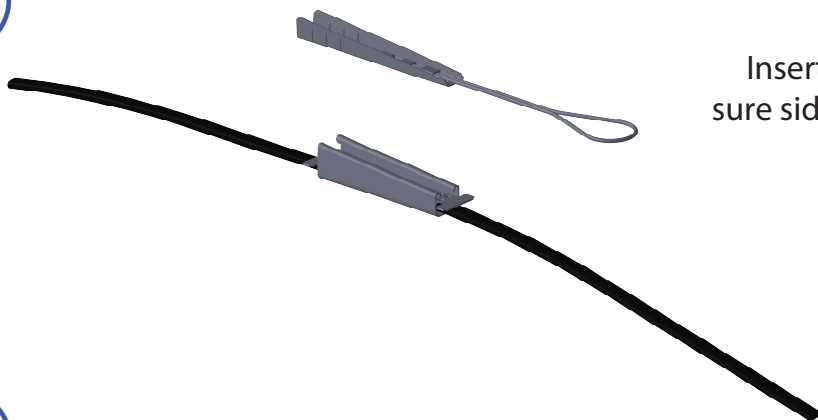


Insert Shim over Fiber Cable making  
sure sidewalls are on either side of Cable.

3



Insert Wedge in to grooves of Shell  
and pull taut.



For technical assistance, sample, or quote  
Please call us at (516)512-7600 or email us at [orders@alliedboltinc.com](mailto:orders@alliedboltinc.com)

3000 Marcus Ave., Suite 3E09 Lake Success, NY 11042  
Fax: (516)512-7611 • [www.alliedboltinc.com](http://www.alliedboltinc.com)

Copyright © 2021 Allied Bolt Products, LLC. All Rights Reserved.