




Allied Bolt Products LLC

#1166

- Used for securing up to 3 guy wires at a utility pole.
- Anchors are installed by simply turning anchor into ground. No Wrench Anchors may be driven by hand or with power equipment.
- Eye dimensions are the same as Anchor Rods.
- Screw anchors consist of an unthreaded triple eye rod with an angled point, and a firmly welded helix.
- Hot dip galvanized to meet ASTM Specification A123.
- Holding strength per soil class for 3/4" rod:
 - Soil Class 5: 6500 lbs
 - Soil Class 6: 5000 lbs
 - Soil Class 7: 2500 lbs
- Typical working torque is 400 ft lbs.

1166	3/4" X 66" TRIPLE STRAND NO-WRENCH SCREW ANCHOR 6" HELIX	20	1	240
------	---	----	---	-----

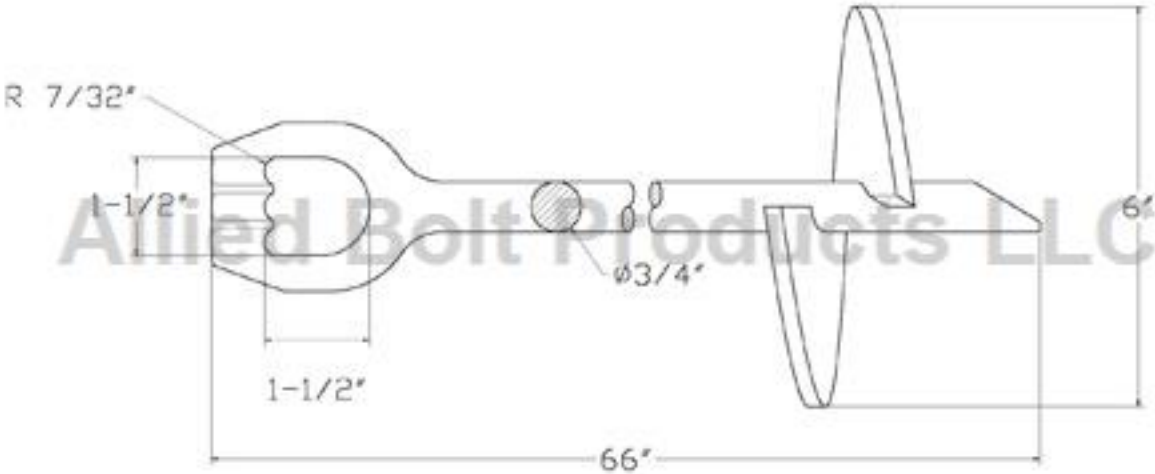

April 04, 2026